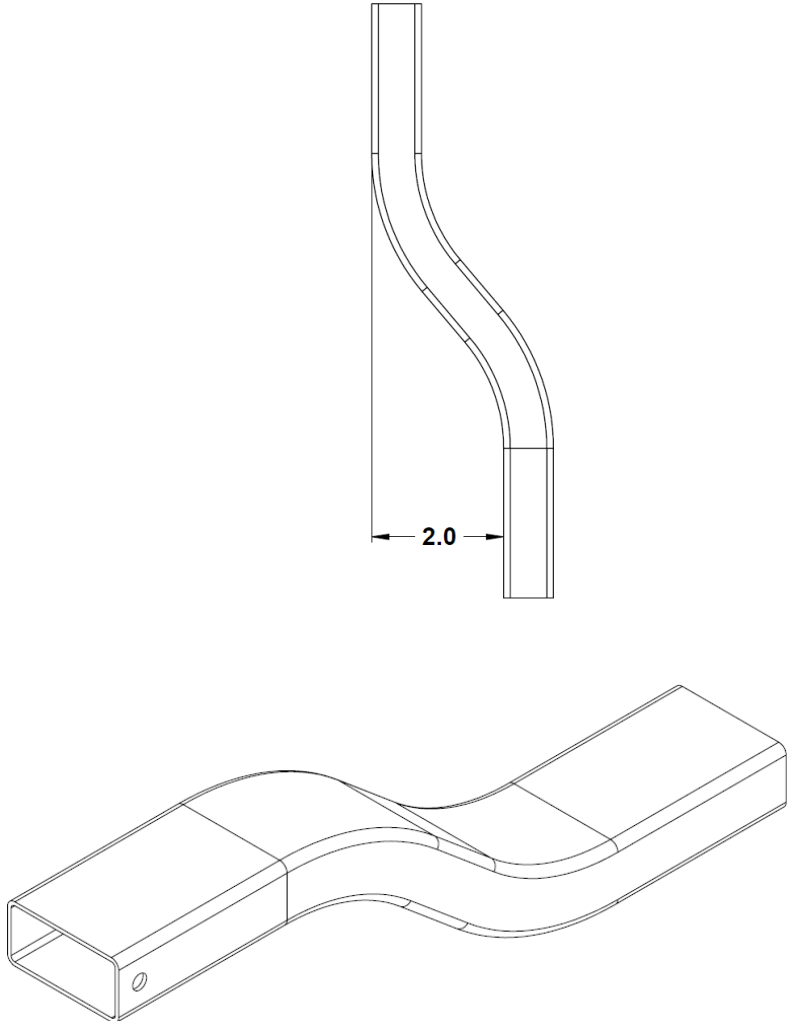



Product Code SMD-CT-OFF-02	Nominal Dimensions N/A	
Description The Secure Mini Dukt™ Offset Connector offsets SMD Tube two (2) additional inches off the wall, and is usually used in multiple parallel run scenarios where a horizontal SDS Raceway is on three inch (3”) spacers, and the vertical SMD tube needs to come back to the wall to properly mount the user drop box (SEC-WM-UDB3-H1). The bend radius of the connector allows smooth cable movement across the connector. An SMD mounting bracket (SMD-WM-MB) or SMD three way (SMD-CT-3WY) is required at the top, and the SMD interface sleeve (SMD-CT-INF) or SMD mounting bracket (SMD-WM-MB) is required at the bottom of the connector to properly hold the connector to the wall.		
Specifications <ul style="list-style-type: none"> • 18-gauge electro-galvanized steel • Tube Profile: Width 1.5” x Height .75” • Provides two (2) inch offset • Weight 0.75 lbs Powder Coat Finish: White Textured		

	Holocom, Inc. www.holocom.com customerservice@holocom.com	PRODUCT CODE: SMD-CT-OFF-02	TITLE: SECURE MINI DUKT™ OFFSET CONNECTOR
		All material contained in this document is the property of Holocom, Inc. and may not be reproduced or transmitted (including electronically) without the written consent of Holocom, Inc. Holocom and the Holocom logo are registered trademarks of Holocom, Inc. Other noted marks are trademarks of their respective companies. Holocom products protected by US Pats. 8,733,798; 7,661,375; 7,608,780; 7,183,488; 7,115,814; 7,053,303; 7,049,517; 6,838,616; 5,831,211; 632,763; 619,097; 580,871 and patents pending. Made in the U.S.A. Copyright © 2015 Holocom, Inc. All rights reserved.	